


PROJECT:

DATE:

TYPE:

PREPARED BY:

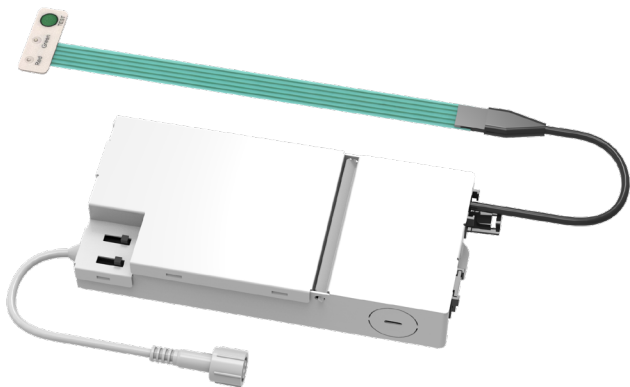

1 SKU with 15 options

CCT
ADJUSTABLE

DAMP
RATED

RoHS

FCC
COMPLIANT

120V

KEY FEATURES

- 2-in-1, compatible with both conventional power supply function and emergency power supply function
- Ideal design for LED downlights; built-in junction box
- 3 selectable wattages and 5 selectable CCTs
- Emergency power is 4.2W for 90 minutes, lithium battery
- Battery protections: over charge protection, over discharge protection, short circuit protection

PERFORMANCE													
Catalog Number	Size	Trim Style	Wattage Equivalency	Input Wattage	Lumens	Efficacy	Dim Type	Input Voltage	Beam Angle	Color Temperature	Environment	Energy Star ID	CRI
DRI-EMB-15S-LV	n/a	n/a	n/a	9/12/15W	n/a	n/a	0-10V	120V	n/a	Field adjustable via dip switch 2700/3000/3500/4000/5000K	Dry/Damp	n/a	n/a

TECHNICAL SPECIFICATIONS

CONSTRUCTION

Product Type

Low Voltage Emergency LED Driver

Size

4", 6"

Shape

Rectangle

Trim Style

n/a

Enclosure Material

n/a

Finish

White

Lens Finish

Frosted

INSTALLATION

Remote Driver/Junction Box

2-in-1, compatible with both conventional power supply function and emergency power supply function.

Mounting

Normal Mode: AC power is present. The AC driver operates the LED load as designed. The emergency driver is charging in a standby

Base Type

n/a

Emergency Backup Remote Driver



TECHNICAL SPECIFICATIONS (CONT.)

ELECTRICAL

Dimmable n/a	Operating Temperature 41°F to 122°F (5°C to 50°C)
Driver n/a	THD n/a
Input Voltage 120V	Power Factor n/a
Operating Frequency 50/60 Hz	Flicker n/a

LED CHARACTERISTICS

Beam Angle n/a	R9 Value n/a
Color Temperature Field adjustable via dip switch 2700/3000/3500/4000/5000K	Color Consistency n/a
Color Accuracy (CRI) n/a	Color Stability n/a
	Color Uniformity n/a

COMPLIANCE

Listings UL8750, UL924, CSA C22.2 NO.141	California Title 24 JA8 Compliant No
ETL Listed n/a	California Energy Commission (CEC) Status Not Lawful for Sales in California
Environment Suitable for use indoors in dry and damp environments.	NEC Compliant n/a
IC Rated n/a	IESNA LM-79 & LM80 Testing n/a
Air Tight n/a	RoHS Mercury and UV free. RoHS-compliant components.
DLC Listed n/a	FCC Complies with Part 15 of the FCC Rules
California Title 20 Compliant No	

OTHER

Warranty

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Trade Agreements Act Compliant

n/a

Buy American Act Compliance


n/a

Note

All values are typical (tolerance +/- 10%)

DIMENSIONS

DRI-EMB-15S-LV

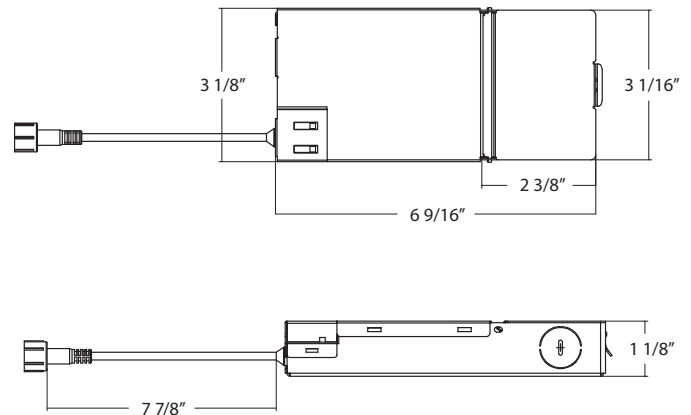

ORDERING INFO

Catalog Number	Model Number	UPC	Case Pack
DRI-EMB-15S-LV	n/a	192552045650	0

ORDERING MATRIX

Family	Battery Backup	Wattage/CCT	Installation Type
DRI	EMB	15S	LV
	Emergency Backup	15S	30-36Vdc Low Voltage
		15/12/9/W selectable and 2700/3000/3500/4000/5000K selectable	