


PAD PENDANT ADAPTOR INSTALLATION INSTRUCTIONS



Thank you for buying RAB lighting fixtures. Our goal is to design the best quality products to get the job done right. We'd like to hear your comments. Call the Marketing Department at 888-RAB-1000, or email: marketing@rabweb.com

IMPORTANT

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

RAB fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.


WARNING: Make certain power is OFF before installing or maintaining fixture. No user serviceable parts inside.

DOWNLIGHT MOUNTING

Mount to a 1/2" or 3/4" NPS threaded pipe (not supplied) with supplied **Locknuts** as a pendant and at the ceiling to a junction box and cover plate (not supplied) appropriate for the weight of the final fixture and compliant with all local electrical, structural and safety codes.

CAUTION: This adaptor can be used for multiple fixture combinations and any length required as long as the installation properly supports the weight of the fixtures.

1. Mount each **ALED fixture** as shown in the sample below. See specific fixture instructions for more details. Use instructions for mounting to a RAB pole. The illustrations below detail models ALED 10W through 26W, for other models refer to fixture specific pole mount instructions.
2. Wire fixtures using UL approved wire connectors and according to NEC and local codes. Connect green **Ground Wire** to the supply ground.
3. Slip **Cap Bracket** onto opposing bolts from fixtures. Orient as shown below. Use shorter **Cap Screw** to mount **Cap** to the **Cap Bracket**.
4. Wrap teflon tape onto the threads to prevent moisture from getting into the **Housing**.

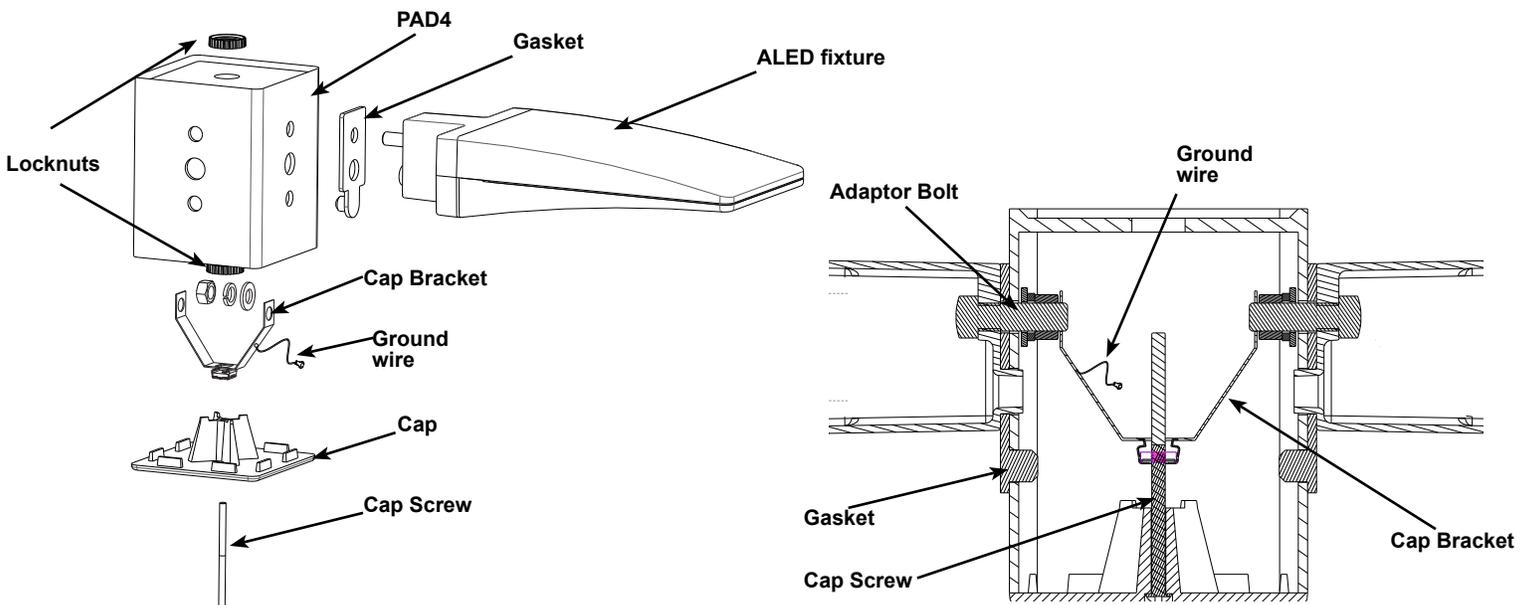


PAD PENDANT ADAPTOR INSTALLATION INSTRUCTIONS

UPLIGHT MOUNTING

Mount to a 1/2" or 3/4" NPS threaded pipe (not supplied) with supplied **Locknuts** as a pendant and at the ceiling to a junction box and cover plate (not supplied) appropriate for the weight of the final fixture and compliant with all local electrical, structural and safety codes.

CAUTION: This adaptor can be used for multiple fixture combinations and any length required as long as the installation properly supports the weight of the fixtures. Refer to specific fixture instructions for suitability as an uplight in wet locations.

1. Mount each **ALED fixture** as shown in the sample below. See specific fixture instructions for more details. Use instructions for mounting to a RAB pole.
2. The illustrations below detail models ALED 10W through 26W, for other models refer to fixture specific pole mount instructions. Wire fixtures using UL approved wire connectors and according to NEC and local codes. Connect green **Ground Wire** to the supply ground.
3. Slip **Cap Bracket** onto opposing bolts from fixtures. Orient as shown below. Use longer **Cap Screw** to mount **Cap** to the **Cap Bracket**.
4. Wrap teflon tape onto the threads to prevent moisture from getting into the **Housing**.

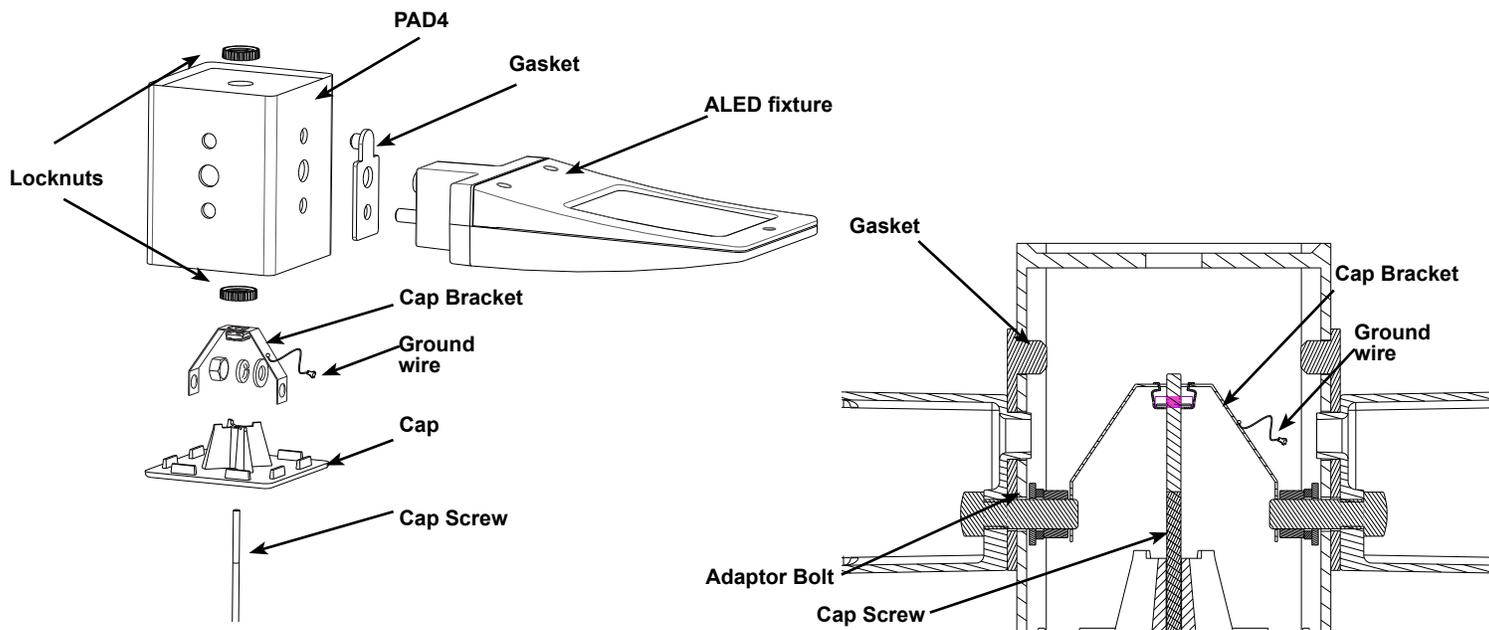

CLEANING & MAINTENANCE

CAUTION: Be sure fixture temperature is cool enough to touch. Do not clean or maintain while fixture is energized.

1. Clean glass lens & fixture with non-abrasive glass cleaning solution.
2. Do not open fixture to clean the LED. Do not touch the LED.

Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.