



High Output CRX.

Powerful commercial downlights with remote driver.

Twice as bright.

CRX is available in four sizes which deliver double the lumen output of most commercial downlights, making them the easy choice for high ceiling applications.

Up to
1500lm
(Compared to
650 lumens)



3"  15W
12W
9W


Up to
2000lm
(Compared to
1000 lumens)



4"  20W
16W
12W


Up to
5000lm
(Compared to
2500 lumens)



6"  50W
40W
30W

Up to
8000lm
(Compared to
2500 lumens)



8"  80W
65W
50W




5-YEAR NO COMPROMISE WARRANTY

RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty



Limited space? No problem.


The CRXLED family is designed with an off-board driver that minimizes installation height, eliminates the need for a j-box or recessed housing, and makes it ideal for shallow plenums with limited installation space. It's also IC rated for direct contact with insulation.

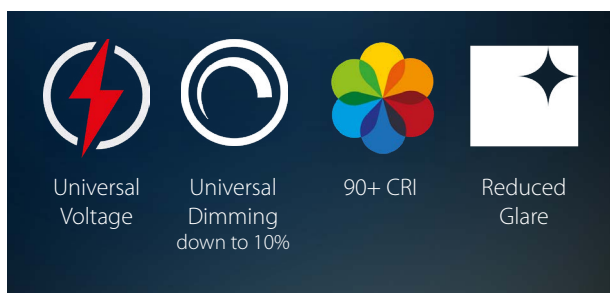

What's under the hood...

CRX has a diffuse polystyrene lens that creates smooth, uniform light and reduces glare without sacrificing lumen output. All models use a 120-277V driver with universal dimming* and produce 90+ CRI for the accurate color rendering often vital in commercial applications.

**6" Model available in 0-10V & Universal Dimming. 8" available only in 0-10V dimming.*

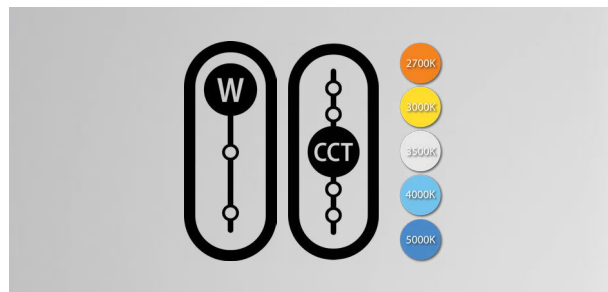

Field-adjustable flexibility.

These commercial downlights allow you to change both lumen output and color temperature with the flick of a switch, giving you the flexibility to customize various areas with one fixture! Available in 3", 4", 6", and 8" diameters, they're ideal for both new construction and retrofit applications.



Anywhere you want it.

All models are airtight and suitable for use in dry, damp, and wet locations, making them perfect for both indoor and outdoor use.


Accessories




Color Trims



Goof Rings



Mounting Frames



Mounting Plates



Emergency Driver

Ordering Matrix

Product Family	Size/Wattage	Shape	CRI/Color Temp	Voltage/Dimming	Finish	Trim
CRX						
3	3", 15/12/9W	Blank	Round	Blank	90 CRI, Field Adjustable	Blank
4	4", 20/16/12W				2700/3000/3500/4000/5000K	
6	6", 50/40/30W					
8	8", 80/65/50W					
				Blank	120V-277V; 0-10V+TRIAC/ELV	Blank
				/D10*	120-277V; 0-10V	White
						Blank
						Smooth

**/D10 is available for 6" and 8" models (8" is only offered as /D10). Please note that wattages for 6" /D10 model are 55/43/32W.*