



# RAB®




## Floodlight solutions for hazardous environments. HAZFFLED—Class I, Div 2 lighting.

### Built tough.

Designed to perform in areas with hazardous vapor and gases, the HAZFFLED is certified for Class I, Division 2, Groups A, B, C, D and has a temperature rating of T4A or higher, depending on the model.

Ideal for use in:

- Petroleum refineries
- Fuel servicing areas
- Utility gas plants
- Dry cleaning plants
- Aircraft hangars

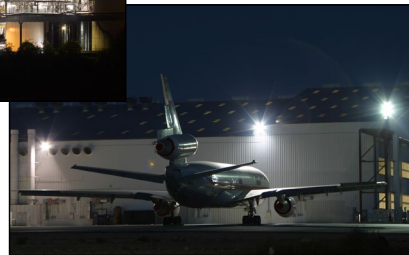



FEATURE PAGE



100,000-HOUR LED  
LIFESPAN



AVAILABLE FOR  
150W MODEL



IP66



5-YEAR,  
NO-COMPROMISE  
WARRANTY

RAB's warranty is  
subject to all terms  
and conditions found at  
[rablighting.com/warranty](http://rablighting.com/warranty)


## Various wattages keep your options open.

The HAZFFLED is available in five wattages—everything from 30W to 200W—for use in countless applications on a single site, and its wide, 7H x 6V NEMA spread is versatile enough for multi-purpose use. 5000K color temperature maximizes visibility to promote a safer environment.



## Accessories.

### Wire Guards

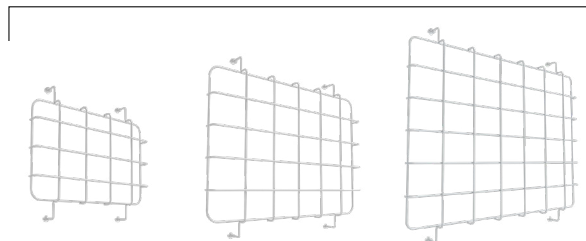


HAZFF-S-WG

HAZFF-M-WG

HAZFF-L-WG


### Hoods

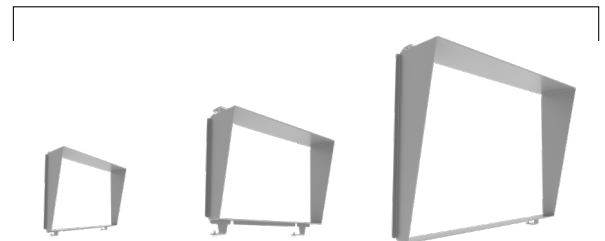

HAZFF-S-H

HAZFF-M-H

HAZFF-L-H



Adjustable Arm  
HAZFF-ADJ-ARM\*  
\*For all model sizes.

## Ordering Matrix

| Product Family | Wattage |      | Mount |            | Color Temp |       | NEMA Type | Finish |       | Driver |                         |
|----------------|---------|------|-------|------------|------------|-------|-----------|--------|-------|--------|-------------------------|
| HAZFFLED       |         |      |       |            |            |       |           |        |       |        |                         |
|                | 30      | 30W  | Blank | Yoke       | Blank      | 5000K | Blank     | 7Hx6V  | Blank | Gray   | Blank                   |
|                | 60      | 60W  | SF    | Slipfitter |            |       |           |        |       |        | 0-10V Dimming, 120-277V |
|                | 100     | 100W |       |            |            |       |           |        |       |        | 480V*                   |
|                | 150     | 150W |       |            |            |       |           |        |       |        |                         |
|                | 200     | 200W |       |            |            |       |           |        |       |        |                         |

\*480V available only for 100, 150, 200W.