


Available from 50W through 480W models, and with four IES distributions and numerous control options, the A17 gives you the right light for the right application, all without breaking the budget.

7 Lumen Packages

The A17 is available in everything from 7,000 lumens to up to 76,300 lumens, while leading competitors only offer up to 5 lumen packages.

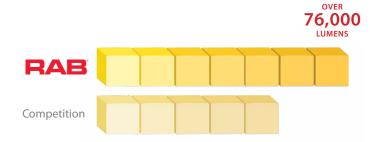

Consistently High Efficacy

Not only does the A17 offer an ultra-high efficacy of up to 175 lm/W, but it delivers high efficacy throughout its entire portfolio.



Mounting Flexibility

With several mounting options available, the A17 can be used throughout various areas for one unified look: parking lots, building façades, adjacent walkways, etc.



Comes standard with Universal Pole Mount

Wall Mount A17-WM



Slipfitter A17-SF-KIT-L A17-SF-KIT-S-M



OPTIONAL MOUNTING ACCESSORIES

Adjustable Universal Pole Mount A17-ADJ-KIT-L A17-ADJ-KIT-S-M



Roadway Arm A17-RW ARM















RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

3-Way field adjustability

The XFU models of the A17 have three selectable features: 3 selectable wattages, 3 selectable color temperatures, and an on/off twistlock photocell, giving you 18 SKUs in one area light.



Control Accessories

All A17 models are available with various control options and accessories to help qualify for additional utility rebates.

* Remote control required for managing settings of the microwave sensor (A17 with MVS sensor only).



Reversible House Side Shields



A17-RHS-S (up to 150W)



A17-RHS-M (200W to 300W)



A17-RHS-L (375W and up)

Ordering Matrices

A17														
Family	Distribution*		Wattage		Mounting		Color Temp		Finish		Voltage Rating		Options	
A17 —	- 🖳													
	3T 4T 5T	Type III Type IV Type V	70 100 150 200 300 375 480	70/60/50W 100/80/60W 150/120/100W 200/180/160W 300/240/200W 375/300/240W 480/400/320W		Universal Pole Mount Slipfitter (150W only)	Blank	3000/4000/5000K CCT Adjustable	Finish	Bronze	Blank /480	120-277V 480V	Blank /3PRS /7PRS /MVS /LCBS /LCBS/MVS	No Option 3-Pin Receptacle & Shorting Cap 7-Pin Receptacle & Shorting Cap Microwave Motion Sensor Lightcloud Blue Enabled w/PIR Sensor Lightcloud Blue Enabled w/MVS Sensor
A17XFU													*Type II disti	ribution available as special order.
Family		Watta	no.	Color Te	mnorat	tura Fir	nich	Voltag	o Ratine	,			Ontions	

Family		Wattage	Color Temperature		Finish		Vol	tage Rating	Options		
A17XFU											
	150 300	150/100/70W 300/240/200W		3000/4000/5000K CCT Adjustable	Blank B W	Bronze Black	Blank	120-277V 0-10V Dimming	Blank	7-pin Receptacle & Shorting Cap 3-pin Twistlock photocell included	
						White			/LC /LCBS /LCBS/M	Lightcloud Controller Lightcloud Blue Enabled w/PIR Sensor VS Lightcloud Blue Enabled w/MVS Sensor	