


RAB®

A22



Interchangeable optics with quality you can trust!

A22—now with various new options!


Changing optics has never been easier.

Available in a wide range of models—everything from 50W to 320W—the A22 comes with interchangeable optics that give you the flexibility to change output in the field. IES Type II, III, IV, and V distributions are all available.



All-in-one maximized versatility.

When you need one fixture to do it all, the A22-150X and 320X deliver. In addition to boasting three selectable wattages and color temperatures, and a twistlock photocell, the X models include three interchangeable lenses (Types III, IV, V) and an adjustable universal pole mount.

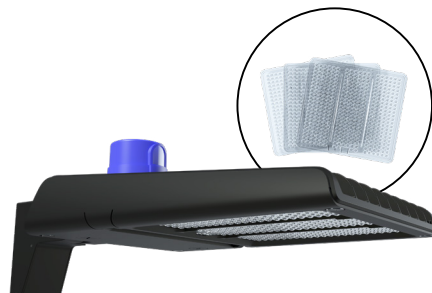

Innovative door design opens/closes with a quick twist and secures the lens against high winds.

Sensors and controls.

All A22 models come standard with a NEMA 7-pin receptacle but can also be ordered with an integrated sensor to help qualify for additional utility rebates. Standard and Lightcloud twistlock photocells can also be purchased as accessories.

Note: remote control required for managing settings of the sensors.





100,000-HOUR LED LIFESPAN



5-YEAR LIMITED WARRANTY

RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

Reduce light pollution.


The A22 family is available in static 3000K models that come standard with a non-adjustable pole mount to limit lighting's impacts on the environment. All 3000K models are DarkSky and DLC LUNA certified.



Interchangeable Optics

	TYPE II	TYPE IV	TYPE V
70 & 100	A22-70/100LENS2T	A22-70/100LENS4T	A22-70/100LENS5T
150 & 200	A22-150/200LENS2T	A22-150/200LENS4T	A22-150/200LENS5T
320	A22-320LENS2T	A22-320LENS4T	A22-320LENS5T

Accessories

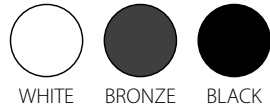

WHITE BRONZE BLACK



SLIPFITTER MOUNT

A22SFW
A22SF
A22SFB




WALL MOUNT

A22WMW
A22WM
A22WMB



NON-ADJUSTABLE POLE MOUNT


A22PMW
A22PM
A22PMB



HOUSE SIDE SHIELDS

A22-70/100HS	A22-150/200HSW
A22-70/100HSB	A22-320HS
A22-70/100HSW	A22-320HSB
A22-150/200HS	A22-320HSW
A22-150/200HSB	

Controls



Twistlock Photocell
R-3P-PCT (120-277V)
R-3P-PCT-480V (480V)



Lightcloud Twistlock Photocell
LCTWIST/K



Remote Control for /MVS and /PIR Models*
MSR1

*Remote control required for managing settings of the sensors.

Lightcloud®

Lightcloud® Blue enabled.

A22 is available with Lightcloud Blue-enabled motion sensing (microwave or passive infrared) which can be configured to adjust brightness and hold time, saving additional energy costs.

Ordering Matrix

Product Family	Optics	Wattages	Color Temp	Mounting	Finish	Voltage	Options					
A22	Blank Type III Type II Type IV Type V	70 100 150 200 320	70/60/50W 100/80/60W 150/120/100W 200/180/160W 320/280/250W	Blank Y	3000/4000/5000K CCT Adjustable 3000K*	Blank Universal Adjustable Pole Mount*	Blank W B	Bronze White Black	Blank /480	120-277V, 0-10V Dimming 480V, 0-10V Dimming	Blank /MVS /LCBS** /LCBS/MVS**	7-Pin Receptacle with Shorting Cap 7-Pin Receptacle with Shorting Cap and Microwave Occupancy Sensor Lightcloud Blue Enabled w/PIR Sensor Lightcloud Blue Enabled w/MVS Sensor

A22 Stocking Unit with 3 Lenses and Twistlock Included

Product Family	Optics	Wattages	Color Temp	Mounting	Finish	Voltage	Options			
A22	Blank Type III Installed, Type IV and Type V included	150X 320X	150/120/100W 320/280/250W	Blank Y	3000/4000/5000K CCT Adjustable	Blank Universal Adjustable Pole Mount	Blank Bronze	Blank 120-277V, 0-10V Dimming	Blank	7-Pin Receptacle with Shorting Cap and 3-Pin Twistlock Photocell

*Static 3000K models include a non-adjustable pole mount in order to qualify for DarkSky and LUNA compliance.
**Only available for bronze models