



The light you want, where you want it.


CCT-selectable wafers with adjustable gimbals.




- A** Spring-loaded retention tabs
- B** Cast aluminum housing and trim
- C** Pivoting gimbal lens
- D** Powder coat finish
- E** IC rated for direct contact with insulation
- F** Off-board driver

Off-board driving.


Installations are really flexible with an off-board driver that minimizes installation height, maximizes thermal management, and eliminates the need for a recessed housing. A plenum-rated cable connector links the downlight module to the remote driver, and then the module snaps into place with the adjustable, spring-loaded retention tabs. The super-thin design allows for these products to be installed inside shallow plenums.



REMOTE DRIVER



ROMEX CONNECTOR

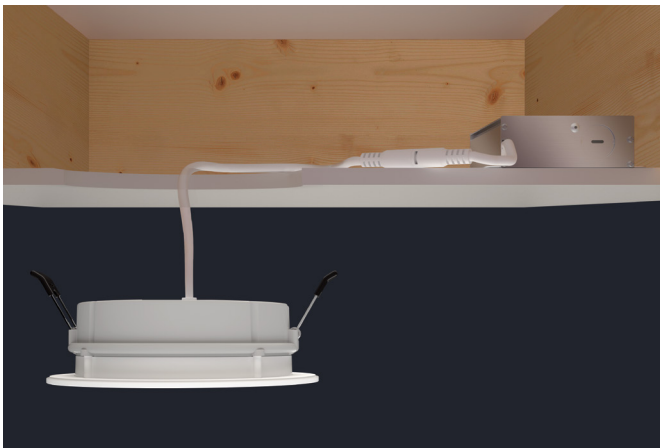



50,000-HOUR
LED LIFESPAN



5-YEAR, NO COMPROMISE
WARRANTY

RAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty




Gimbal models have a 25°
tilt and 360° rotation for
directional lighting control.

Ambient or accent lighting...you choose.

This line of downlights was designed to simplify
the process of installing tailored lighting in
challenging locations. All models use a diffusion
lens to create smooth, uniform light.

Accessories

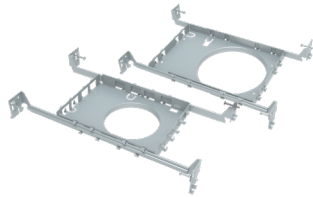

[Mounting Plates](#)



[Extension Cables](#)



[Battery Backup](#)

Anywhere you want it.

All models are IC rated for direct contact
with insulation and suitable for use in dry,
damp and wet locations, making them
perfect for both indoor and outdoor use.
Extension power cables are available in
three sizes to help you get these lights
exactly where you need them.



90 CRI
available



Dimmable
down to 10%

We've got the basics covered.

Available in 4" and 6" models and with five selectable color
temperatures, these wafers deliver 90+ CRI for accurate color
rendering and are dimmable with most standard TRIAC
dimmers (120V).

Ordering Matrix

Family	Size	Shape	Wattage	CRI/Color Temp	Voltage	Finish	Trim
WFRLA	4 6	R Round	8 8W 12 12W	9FA 90CRI Field Adjustable	120 120V	W White	S Smooth