

RAB®

More flexibility for better value.

CD34—now with
swappable optics!



Wall Mount

3", 4", and 6"



3000K

4000K

5000K



Cord, Surface, and Pendant* Mount

4" and 6"



2700K

3000K

3500K

4000K

5000K



Pendant
Mount





Feature Page



50,000-Hour LED Lifespan



JAB compliant.



CERTIFIED

CERTIFIED TO UL STANDARD 1598 AND 844



*SURFACE MOUNT ONLY



5-YEAR, LIMITED WARRANTY


RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty



The easy switch.

The new generation of CD34 cylinders offers an additional layer of versatility: swappable optics that let you switch between a tight 25° beam, a wider 40° distribution, and an even wider 60°. Switching them is just a twist away!

**3" models come standard with 25° optics, 4" come with 40°, and 6" come with 60°.
Accessories are available for all sizes in all three distributions.

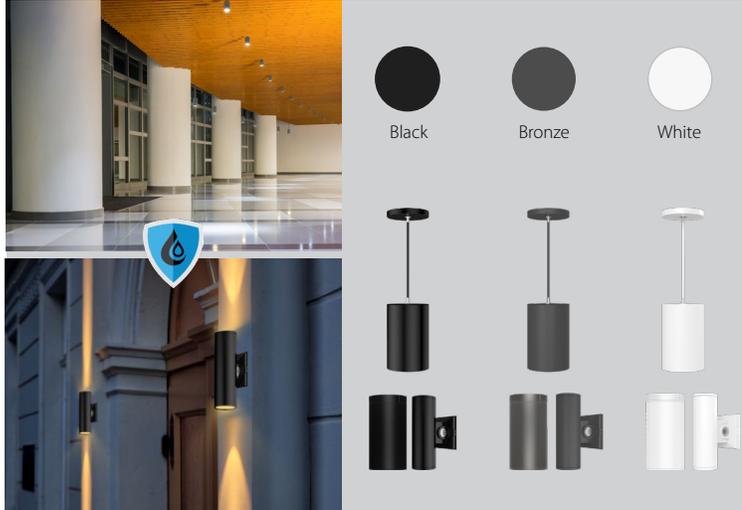

In or out, you decide.

All CD34s are UL listed for wet locations, making them a great option for both indoor and outdoor applications from kitchens, conference rooms and auditoriums, to entryways, façades and awnings.

Accessories

Convert your surface mount cylinders to pendant mounts with these accessory kits, which include four connectable 12" stems.

CD34 models come standard with a clear glass lens but frosted lenses are available for all sizes and color finishes.



CD34STEM-K



CD34STEM-W



CD34STEM-Z



CD34LENS-3FRK
CD34LENS-4FRK
CD34LENS-6FRK



CD34LENS-3FRW
CD34LENS-4FRW
CD34LENS-6FRW



CD34LENS-3FRZ
CD34LENS-4FRZ
CD34LENS-6FRZ



CD34REF-325D
CD34REF-340D
CD34REF-360D



CD34REF-425D
CD34REF-440D
CD34REF-460D



CD34REF-625D
CD34REF-640D
CD34REF-660D

Ordering Matrix

Wall Mount

Product Family	Size/Wattage	Mounting	Color Temp	Driver	Finish
CD34		W			
	3" 10/8/6W	W	Blank 90CRI, 3000/4000/5000K	Blank 120-277V, 0-10V Dimming	W K Z
	4" 20/16/12W				White Black Bronze
	6" 36/28/22W				

Surface/Pendant Mount

Product Family	Size/Wattage	Mounting	Color Temp	Driver	Finish
CD34		SP			
	4" 20/16/12W	SP Surface or Pendant	Blank 90CRI, 2700/3000/3500/4000/5000K	Blank 120-277V, 0-10V Dimming	W K Z
	6" 30/24/18W				White Black Bronze