

# RAB®

# FGIMBAL



## Built to take the heat.

Field-adjustable, fire-resistant, gimbal downlights.


### Tested to take the heat.

All FGIMBAL models have been tested to UL 263 and ASTM E119 standards for 2-hour fire resistance.



### 5 Selectable color temperatures.

These field-adjustable gimbal downlights allow you to change color temperature (2700/3000/3500/4000/5000K) with the flick of a switch! They're ideal for both new construction and retrofit applications. Models are offered in 4" (9W) and 6" (14W).

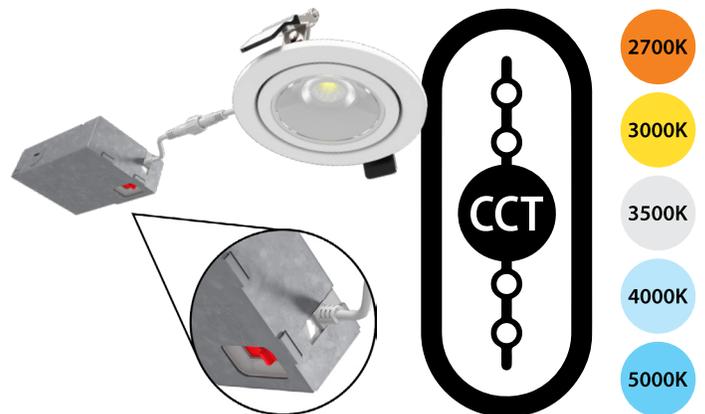



FEATURE PAGE




50,000 HOUR LED LIFESPAN



5-YEAR NO COMPROMISE WARRANTY

RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty)

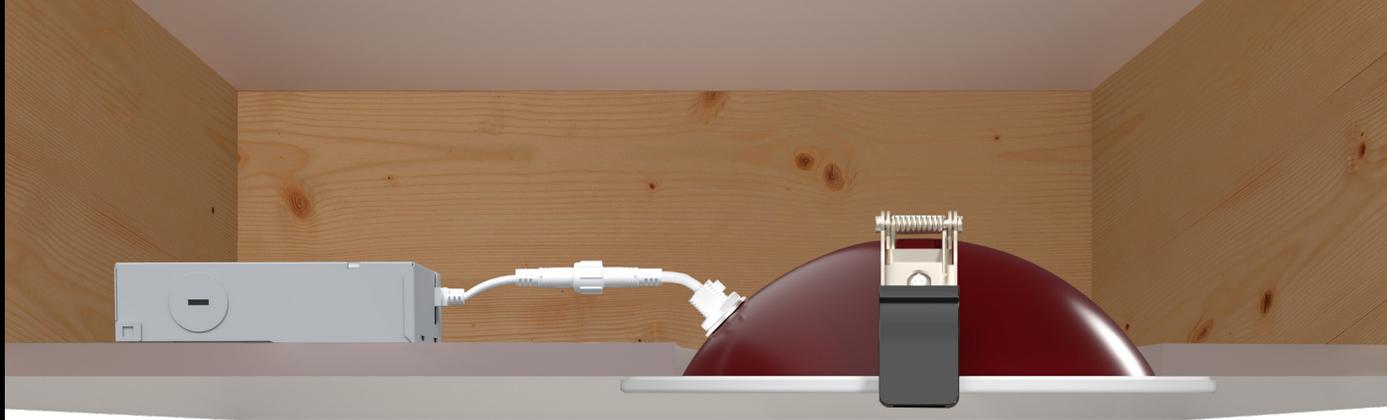

## Remote driver.

Installations are super flexible with an off-board driver that minimizes installation height, maximizes thermal management, and eliminates the need for a traditional recessed housing or “can”. A plenum-rated cable connector links the downlight module to the remote driver, and then the module snaps into place with the adjustable, spring-loaded retention clips.

The remote driver box has quick connectors, knockouts and plenty of space for daisy chain wiring or adding an emergency backup unit.




REMOTE DRIVER



FT2 PLENUM RATED CABLE CONNECTOR

## Put light where you need it most.

The FGIMBAL was designed to simplify the process of installing tailored lighting in challenging locations. All models have a pivoting gimbal lens with a 90° tilt and 360° rotation for directional lighting control.

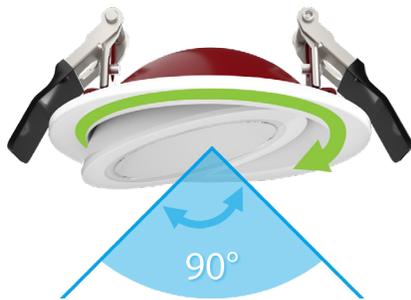


## High performance.

The FGIMBAL is dimmable with TRIAC/ELV forward and reverse phase cut dimmers (120V) —and Title 24 compliant. 90 CRI provides accurate color rendering, making them ideal for commercial applications where color is critical.



90 CRI



TRIAC/ELV Dimmable down to 10%

## Ordering Matrix

Product Family	Size/Wattage	Shape	CRI/Color Temp	Driver	Finish	Trim		
FGIMBAL	4 6	4", 9W 6", 14W	Blank Round	Blank	90CRI, 2700/3000/3500/4000/5000K CCT Adjustable	Blank 120V, TRIAC/ELV	Blank White + Red	Blank Smooth