


RAB®

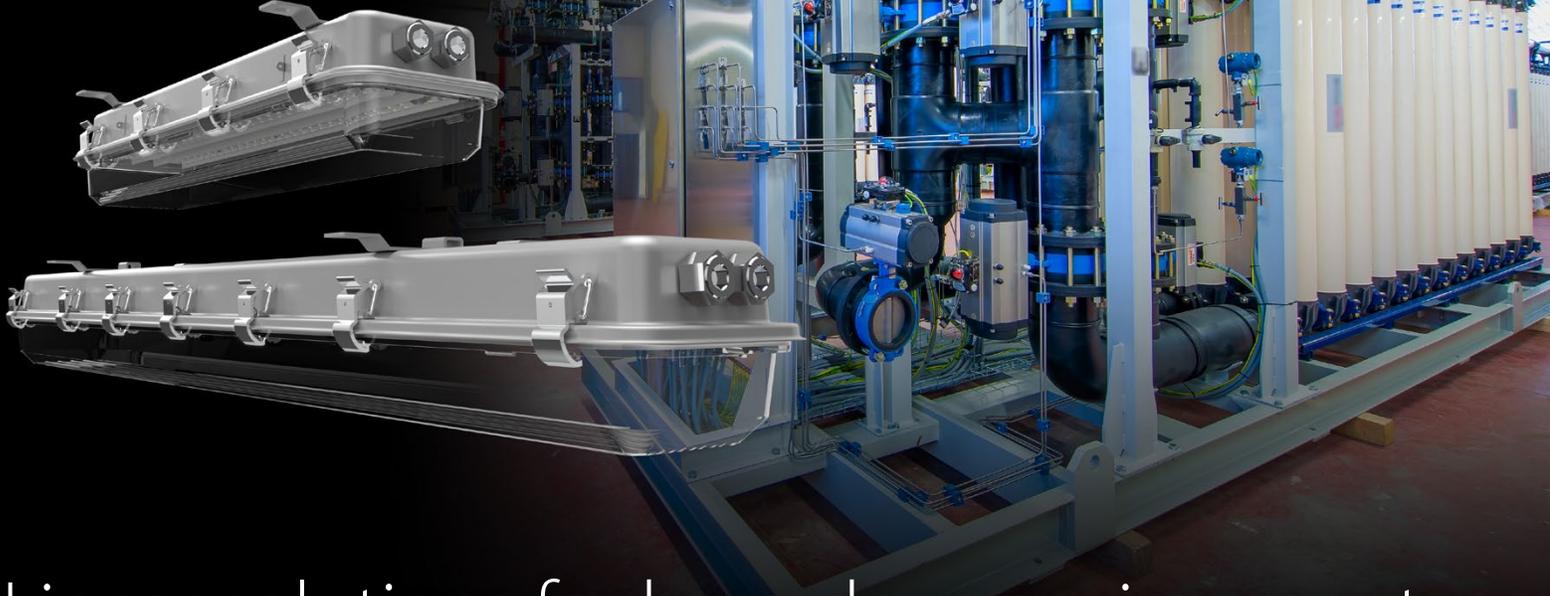

Linear solutions for hazardous environments. HAZSHARK—Designed for use in various locations.


Classified for various applications.

Designed to perform in a hazardous environment, the HAZSHARK is UL Marine Listed and certified for use in the following locations:

- Class I, Division 2 (Groups A, B, C, D)
- Class II, Division 2 (Groups F, G)
- Class II, Division 1 (Groups E, F, G)
- Class III

Built tough.

Available in 2' (30W) and 4' (50W) in 5000K, the HAZSHARK is waterproof, vaporproof, and corrosion resistant, with a stainless steel housing and an impact-resistant polycarbonate lens.

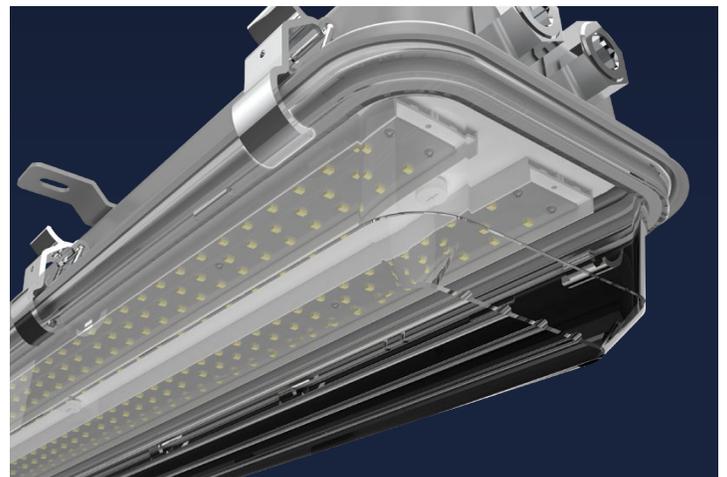



RATING




100,000-HOUR LED LIFESPAN



5-YEAR, NO COMPROMISE WARRANTY

RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

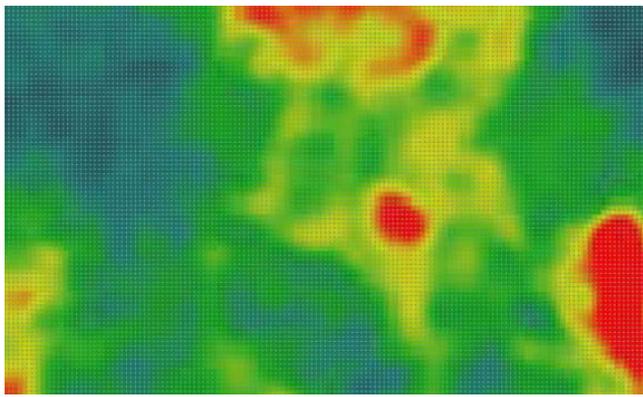

T-code temperature rating.

The HAZSHARK runs much cooler than equivalent incandescent and metal halide fixtures, giving the 2' model a T6 rating and the 4' model a T5 rating for use in most environments.

Secure installations.


All models come standard with two mounting options—stainless steel, surface mount brackets or aircraft cable for pendant mount—that resist vibrations and ensure safe operation.



Surface mount brackets



Aircraft cable for pendant mount (59" cable length)

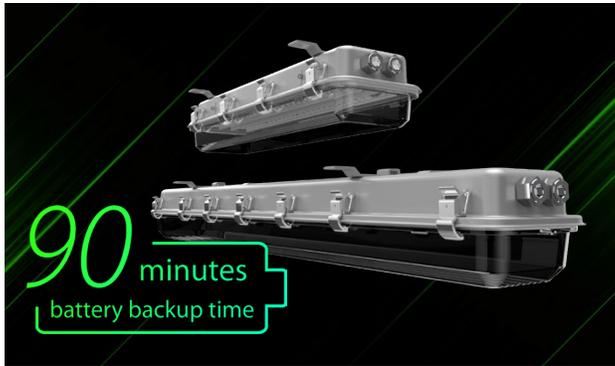

Emergency use.

HAZSHARK is available with an emergency battery backup that will guarantee operation for a minimum of 90 minutes.

Ordering Matrices

Family	Size/Wattage	Color Temp	Finish	Voltage	Options					
HAZSHARK	2 ft 4 ft	(30W) (50W)	Blank	5000K	Blank	Gray	Blank	010V Dimming, 120-277V	Blank /E	No Option Emergency Backup