


Lightcloud[®]

Commercial Applications

All Lightcloud Blue-enabled products will instantly connect to the systems app via Bluetooth mesh, getting you up and running in minutes. No Gateway or Hub required.

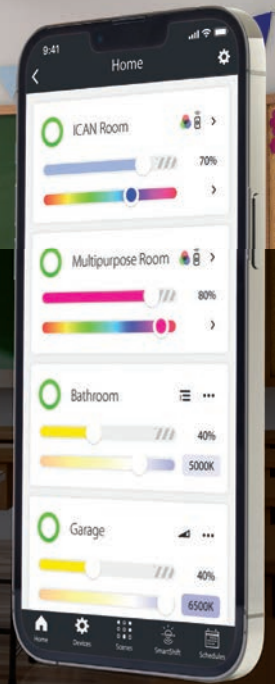

Features



No Gateway or Hub required:
Using Bluetooth Mesh, each device communicates with the others to extend the range further.



Rapid Provisioning: Pair in groups of up to 100 fixtures simultaneously in minutes. Save time and labor.



Wireless Control: Full wireless control for on/off, dimming, and color temperature for tens of thousands of devices




SmartShift™*: Circadian lighting adjusts light levels and color temperature to match the natural pattern of the sun.

**Available on select products. Nano required.*



Occupancy Sensor: Integrated occupancy sensor for customizable motion control.



Daylight Harvesting: Supports daylight harvesting for indoor and outdoor fixtures with integrated and standalone options.

Panels & Troffers

EZPAN® FA



RPLED



T34™ FA



SWISH® FA



RTLED



G-SWISH™



High Bays

H17™



RBAY17™



AEROBAY® FA



Strips & Wraps

GUS17™



SR™



TOMO™



BOA®



Recessed & Surface Downlights



Commercial



Retrofit



SUMO™



Edge-Lit Wafer



DSK34



Accessories

Nano



Dimmers



Wireless Remote



Sensors



Emergency Battery Backup



RAB®

©2024 RAB Lighting, Inc.

RAB is continually improving our products. Specifications may change without notice. The designs of RAB fixtures are protected under U.S. and international intellectual property laws.