



RAB

And now, entering the field...PLAYER ONE.
Sports lighting that's undefeatable.

Innovation in play.

Available in 4 lumen packages and 3 NEMA distributions, you can fine-tune your lighting to match any field's needs.



P1-L (850W) and
P1-XL (1200W)

P1RGB (480W),
P1S (500W) and P1M (600W)

RGB lights up the excitement.

The RGB option integrates with existing DMX control systems* so you can upgrade your lighting without a complete overhaul.



**DMX control system not included with PLAYER ONE models.
RGB model will not produce white light.*



FEATURE PAGE



100,000 HRS
LED Lifespan



0-10V



480V




IP65
IP RATING



10-YEAR
LIMITED
WARRANTY

RAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty

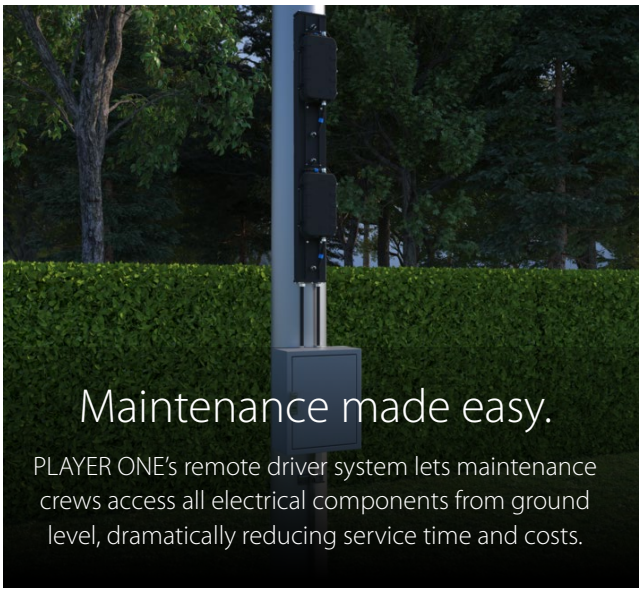

Maintenance made easy.

PLAYER ONE's remote driver system lets maintenance crews access all electrical components from ground level, dramatically reducing service time and costs.



Built for the long game.

A rugged, die-cast housing and IP65 rating ensure reliable operation in demanding conditions, with an operating range from -40°F to 122°F.



The power of Lightcloud.

Models are available with Lightcloud control, providing sophisticated, remote management capabilities that include scheduling and system alerts.

Accessories.



P1-SF
Slipfitter Adaptor



P1-SB
Square Beam Mounting Bracket
(for square cross arms)



P1-MR
Power Box Mounting Rail



P1-MR-RGB
Power Box Mounting Rail for RGB



P1-13C
Extension Cord Up to 164'



P1GCS-S-M
Glare Control Shield for S and M



P1GCS-L-XL
Glare Control Shield for L and XL



P1-LAS
Laser Aiming Sight

Ordering Matrix

| Product Family | Wattage | Color Temperature | Mounting | Optics | Finish | Driver | Options | | | | | | | |
|----------------|-------------------|--------------------------------|----------|--------|--------|------------|---------------------|-------------------------|-------|-------|---------------|--|--------------|---------------------------------------|
| P1 | S M L XL | 500W 600W 850W 1200W* | BLANK | 5700K | BLANK | Yoke Mount | BLANK B33 B22 | 4Hx4V 3Hx3V 2Hx2V | BLANK | Black | BLANK /480 | 120-277V, 0-10V dimming 200-480V, 0-10V dimming | BLANK /LC | No Option Lightcloud Controller ** |
| Product Family | Wattage | Color Temperature | Mounting | Optics | Finish | Driver | Options | | | | | | | |
| P1 | Blank | 480W | RGB | RGB | BLANK | Yoke Mount | BLANK | 4Hx4V | BLANK | Black | BLANK /480 | 120-277V, DMX 200-480V, DMX | BLANK | No Option |

*XL (1200W) only available for 200-480V

**LC option available for S, M, L 120-277V