

BRISK17, Field-Adjustable, Ultra-Economy Entry Light **RAB**



BRISK17FA - BRONZE



BRISK17FA - WHITE

Field-adjustable, ultra-economy entry light

IP65

IP RATING



FIELD
ADJUSTABLE



0-10V



100,000
HRS



WET
RATED

PROJECT:

DATE:

TYPE:

PREPARED BY:



KEY FEATURES

- High output, high efficiency, **Ultra-economy** entry light
- Available field-adjustable CCT (3000K/4000K/5000K)
- Available wattages: 20W and 30W
- Comes with integrated photocell
- 0-10V dimming standard
- UL listed for wet locations
- 5-year limited warranty

PERFORMANCE

BRISK17FA-20W	3000K	4000K	5000K
INPUT WATTS	19W	20W	20W
LUMENS	2,600	2,921	2,703
EFFICACY	135	147	137
CRI	80	80	80
VOLTAGE RATINGS	120-277V		

BRISK17FA-30W	3000K	4000K	5000K
INPUT WATTS	29.17W	29.6W	30.6W
LUMENS	3,947	4,362	4,207
EFFICACY	135.3	147.2	137.6
CRI	81	83	81
VOLTAGE RATINGS	120-277V		

TECHNICAL SPECIFICATIONS

COMPLIANCE

UL Listed

Suitable for wet locations

DLC Listed

This product family is listed with the Design Lights Consortium (DLC). Individual SKUs with this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Product list (QPL) at designlights.org to confirm the qualification status of a specific SKU prior to specification or purchase.

ELECTRICAL

Drivers:

Constant Current, Class 2, 120-277V, 50/60 Hz

20W: 120V: 0.20A, 208V: 0.10A, 240V: 0.08A, 277V: 0.07A

30W: 120V: 0.26A, 208V: 0.15A, 240V: 0.13A, 277V: 0.12A

Photocell

120-277V compatible, Integrated Button Photocell included.

Note

All values are typical (tolerance +/- 10%)

CONSTRUCTION

IP Rating

Ingress protection rating of IP65 for dust and water

Cold Weather setting

Minimum starting temperature is -40°C (-40°F)

Maximum Ambient Temperature

Suitable for use in up to 45°C (113°F)

Housing

Precision die-cast aluminum housing and door frame

Mounting

Hinged wiring access and conduit entries on the back sides, top and bottom make installation a snap

Lens

Polycarbonate lens

Cut Off

Adjustable from 0° (full cutoff) to 90°. 7 settings at 15° each

Green Technology

Mercury and UV free. RoHS-compliant components.

Finish

Formulated for high durability and long lasting color

BRISK17, Field-Adjustable, Ultra-Economy Entry Light

RAB

TECHNICAL SPECIFICATIONS

FIELD ADJUSTABLE

Adjustable CCT: 3000/4000/5000K

LED CHARACTERISTICS

LEDs
Long-life, high-efficacy, surface-mount LEDs

OTHER


Warranty
The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Lifespan
100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

DIMENSIONS

BRISK17FA

Weight 2.3 lbs

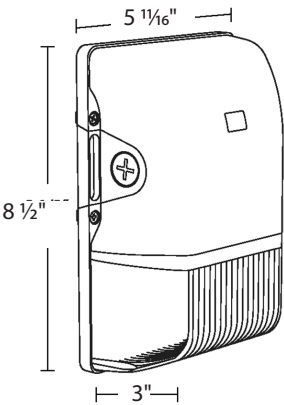

ORDERING MATRIX

BRISK17FA

Family	Wattage		Color Temperature	Finish		Driver/Voltage	Options	
BRISK17FA								
	20	20W	BLANK	BLANK	BLANK	120-277V	BLANK	Integrated Button Photocell
	30	30W		W	Bronze White	0-10V Dimming		