

Decorative Filament Lamps



PROJECT: _____

DATE: _____

TYPE: _____

PREPARED BY: _____



KEY FEATURES

- Replacement for **conventional decorative lamps**
- **Filament LED construction** gives a unique traditional look and feel for decorative and ambient applications
- Produces rich and vibrant colors, **>90CRI**
- Traditional **glass enclosure**
- Rated for use in **enclosed and open fixtures in wet/damp locations**
- **Longer lifespan** compared to legacy equivalents minimizes replacement and maintenance costs
- **Title 20 Compliant, UL Listed**
Smooth, uniform **dimming down to 10%**
(check dimmer compatibility list)
- **3-Years, No-Compromise Warranty**



LED A19, candle, globe and Edison lamps with decorative filament design



PERFORMANCE

Catalog Number	Equivalency	Input Wattage	Lumens	Finish	Efficacy lm/W	Base Type	Color Temperature	CRI	L70 Lifespan	Wet / Damp Rated	T20 Compliant
A15-4-E26-827-F-C	40W Incandescent	4W	450	Clear	100	E26	2700K	80	15,000	Wet	X
A15-4-E26-827-F-F			450	Frosted	100	E26	2700K	80		Wet	X
B11-3-E12-927-F-C		3W	300	Clear	91	E12	2700K	90		Damp	✓
B11-3-E26-927-F-C			300	Clear	91	E26	2700K	90		Damp	✓
B11-3-E12-927-F-F			300	Frosted	91	E12	2700K	90		Damp	✓
B11-3-E26-927-F-F			300	Frosted	91	E26	2700K	90		Damp	✓
B11-5-E12-927-F-C	60W incandescent	5W	500	Clear	91	E12	2700K	90		Damp	✓
B11-5-E12-930-F-C			500	Clear	91	E12	3000K	90		Wet	✓
B11-5-E12-940-F-C			500	Clear	91	E12	4000K	90		Wet	✓
B11-5-E26-927-F-C			500	Clear	91	E26	2700K	90		Damp	✓
B11-5-E12-927-F-F			500	Frosted	91	E12	2700K	90		Damp	✓
B11-5-E26-927-F-F			500	Frosted	91	E26	2700K	90		Damp	✓
BA11-3-E12-927-F-C	40W Incandescent	3W	300	Clear	91	E12	2700K	90		Damp	✓
BA11-3-E26-927-F-C			300	Clear	91	E26	2700K	90		Damp	✓
BA11-3-E12-927-F-F			300	Frosted	91	E12	2700K	90		Damp	✓
BA11-3-E26-927-F-F			300	Frosted	91	E26	2700K	90		Damp	✓
BA11-5-E12-927-F-C	60W Incandescent	5W	500	Clear	91	E12	2700K	90		Damp	✓
BA11-5-E26-927-F-C			500	Clear	91	E26	2700K	90		Damp	✓
BA11-5-E12-927-F-F			500	Frosted	91	E12	2700K	90		Damp	✓
BA11-5-E26-927-F-F			500	Frosted	91	E26	2700K	90		Damp	✓

Decorative Filament Lamps



PERFORMANCE

Catalog Number	Equivalency	Input Wattage	Lumens	Finish	Efficacy lm/W	Base Type	Color Temperature	CRI	L70 Lifespan	Wet / Damp Rated	T20 Compliant
G16.5-3-E12-927-F-F	40W Incandescent	3W	350	Frosted	92	E12	2700K	80	15,000	Damp	✓
G16.5-3-E12-950-F-F		3W	350	Frosted	92	E12	5000K	80		Damp	✓
G16.5-3-E12-927-F-C		3W	350	Clear	92	E12	2700K	90		Damp	✓
G16.5-3-E12-950-F-C		3W	350	Clear	92	E12	5000K	90		Damp	✓
G16.5-3-E26-927-F-F		3W	350	Frosted	92	E26	2700K	90		Damp	✓
G16.5-3-E26-950-F-F		3W	350	Frosted	92	E26	5000K	90		Damp	✓
G16.5-3-E26-927-F-C		3W	350	Clear	92	E26	2700K	90		Damp	✓
G16.5-3-E26-950-F-C		3W	350	Clear	92	E26	5000K	90		Damp	✓
G25-3-E26-927-F-C		3W	350	Clear	88	E26	2700K	90		Damp	✓
G25-3-E26-930-F-C		3W	350	Clear	92	E26	3000K	90		Wet	✓
G25-3-E26-940-F-C		3W	350	Clear	92	E26	4000K	90		Wet	✓
G25-3-E26-950-F-C		3W	350	Clear	88	E26	5000K	90		Wet	✓
G25-3-E26-927-F-F		3W	350	Frosted	92	E26	2700K	90		Wet	✓
G25-3-E26-950-F-F		3W	350	Frosted	92	E26	5000K	90		Wet	✓
G25-5-E26-927-F-C	60W Incandescent	5W	500	Clear	91	E26	2700K	90		Wet	✓
G25-5-E26-927-F-F		5W	500	Frosted	91	E26	2700K	90		Wet	✓
A19-5-E26-927-F-C	40W Incandescent	5W	450	Clear	90	E26	2700K	90		Wet	✓
A19-5-E26-950-F-C		5W	450	Clear	90	E26	5000K	90		Wet	✓
A19-5-E26-927-F-F		5W	450	Frosted	90	E26	2700K	90		Wet	✓
A19-5-E26-950-F-F		5W	450	Frosted	90	E26	5000K	90		Wet	✓
A19-9-E26-927-F-C	60W Incandescent	9W	810	Clear	90	E26	2700K	90		Wet	✓
A19-9-E26-930-F-C		9W	810	Clear	90	E26	3000K	90		Wet	✓
A19-9-E26-940-F-C		9W	810	Clear	90	E26	4000K	90		Wet	✓
A19-9-E26-950-F-C		9W	810	Clear	90	E26	5000K	90		Wet	✓
A19-9-E26-927-F-F		9W	810	Frosted	90	E26	2700K	90		Wet	✓
A19-9-E26-950-F-F		9W	510	Frosted	90	E26	5000K	90		Wet	✓
ST19-3-E26-927-F-C	40W Incandescent	3W	350	Clear	92	E26	2700K	90		Wet	✓
ST19-5-E26-927-F-C	60W Incandescent	3W	500	Clear	91	E26	2700K	90		Wet	✓

TECHNICAL SPECIFICATIONS

CONSTRUCTION

Product Type

Decorative

Bulb Shape

B11 | G25 | A19 | ST19

Enclosure Material

Glass

Enclosure Finish

Clear | Frosted

Base Type

E12 | E26

Beam Angle

360°

ELECTRICAL

Power Factor

≥0.7

Input Voltage

120V

Operating Frequency

60Hz

Operating Temperature

-20°C to 40°C

TECHNICAL SPECIFICATIONS (CONT.)

COMPLIANCE

Safety Listing

UL Listed

FCC

Complies with Part 15 of the FCC Rules.

RoHS

Mercury and UV free. RoHS-compliant components.

OTHER

Warranty


RAB warrants that our LED products will be free from defects in materials and workmanship for a period of Three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

DIMENSIONS


B11-E12

Weight: 0.08 lb



B11-E26

Weight: 0.08 lb




BA11-E12

Weight: 0.08 lb




BA11-E26

Weight: 0.08 lb




G16.5-E12

Weight: 0.08 lb




G16.5-E26

Weight: 0.08 lb




G25-E26

Weight: 0.13 lb




A15

Weight: 0.10 lb




A19

Weight: 0.10 lb



ST19

Weight: 0.11 lb

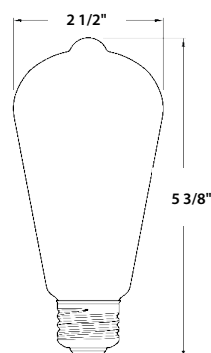

ORDERING INFO

Catalog Number	Model Number (DLC)	UPC	Case Pack
A15-4-E26-827-F-C	A10032	019813834047	12
A15-4-E26-827-F-F	A10033	019813834054	12
B11-3-E12-927-F-C	B11-3-E12-927-F-C	019813748474	12
B11-3-E26-927-F-C	B11-3-E26-927-F-C	019813748481	12
B11-3-E12-927-F-F	B11-3-E12-927-F-F	019813748498	12
B11-3-E26-927-F-F	B11-3-E26-927-F-F	019813748504	12
B11-5-E12-927-F-C	B11-5-E12-927-F-C	019813748559	12
B11-5-E12-930-F-C	B11-5-E12-930-F-C	192552000253	12
B11-5-E12-940-F-C	B11-5-E12-940-F-C	192552000260	12
B11-5-E26-927-F-C	B11-5-E26-927-F-C	019813748566	12
B11-5-E12-927-F-F	B11-5-E12-927-F-F	019813748573	12
B11-5-E26-927-F-F	B11-5-E26-927-F-F	019813758580	12
BA11-3-E12-927-F-C	BA11-3-E12-927-F-C	019813748511	12
BA11-3-E26-927-F-C	BA11-3-E26-927-F-C	019813748528	12
BA11-3-E12-927-F-F	BA11-3-E12-927-F-F	019813748535	12
BA11-3-E26-927-F-F	BA11-3-E26-927-F-F	019813748542	12
BA11-5-E12-927-F-C	BA11-5-E12-927-F-C	019813748597	12
BA11-5-E26-927-F-C	BA11-5-E26-927-F-C	019813748603	12
BA11-5-E12-927-F-F	BA11-5-E12-927-F-F	019813748610	12
BA11-5-E26-927-F-F	BA11-5-E26-927-F-F	019813748627	12
G16.5-3-E12-927-F-F	G16.5-3-E12-927-F-F	019813748634	12
G16.5-3-E12-950-F-F	G16.5-3-E12-950-F-F	019813748641	12
G16.5-3-E12-927-F-C	G16.5-3-E12-927-F-C	019813748658	12
G16.5-3-E12-950-F-C	G16.5-3-E12-950-F-C	019813748665	12
G16.5-3-E26-927-F-F	G16.5-3-E26-927-F-F	019813748672	12
G16.5-3-E26-950-F-F	G16.5-3-E26-950-F-F	019813748689	12
G16.5-3-E26-927-F-C	G16.5-3-E26-927-F-C	019813748696	12
G16.5-3-E26-950-F-C	G16.5-3-E26-950-F-C	019813748702	12
G25-3-E26-927-F-C	G25-3-E26-927-F-C	019813748719	6
G25-3-E26-930-F-C	G25-3-E26-930-F-C	192552000239	6
G25-3-E26-940-F-C	G25-3-E26-940-F-C	192552000246	6
G25-3-E26-950-F-C	G25-3-E26-950-F-C	019813748726	6
G25-3-E26-927-F-F	G25-3-E26-927-F-F	019813748733	6
G25-3-E26-950-F-F	G25-3-E26-950-F-F	019813748740	6
G25-5-E26-927-F-C	G25-5-E26-927-F-C	192552000185	6
G25-5-E26-927-F-F	G25-5-E26-927-F-F	192552000192	6
A19-5-E26-927-F-C	A19-5-E26-927-F-C	019813748757	12
A19-5-E26-950-F-C	A19-5-E26-950-F-C	019813748764	12
A19-5-E26-927-F-F	A19-5-E26-927-F-F	019813748771	12
A19-5-E26-950-F-F	A19-5-E26-950-F-F	019813748788	12

Decorative Filament Lamps



Catalog Number	Model Number (DLC/Energy Star)	UPC	Case Pack
A19-9-E26-927-F-C	A19-9-E26-927-F-C	019813748795	12
A19-9-E26-930-F-C	A19-9-E26-930-F-C	192552000215	12
A19-9-E26-940-F-C	A19-9-E26-940-F-C	192552000222	12
A19-9-E26-950-F-C	A19-9-E26-950-F-C	19813748801	12
A19-9-E26-927-F-F	A19-9-E26-927-F-F	19813748818	12
A19-9-E26-950-F-F	A19-9-E26-950-F-F	19813748825	12
ST19-3-E26-927-F-C	ST19-3-E26-927-F-C	19813748832	8
ST19-5-E26-927-F-C	ST19-5-E26-927-F-C	192552000208	8

ORDERING MATRIX

Family	Wattage	Base Type	CRI/Color Temp	LED Construction	Enclosure Finish
A15	-	-	-	-	-
	4 4W/40W EQ	E26 E26 Base	827 80 CRI, 2700K	F Filament	F C Frosted Clear

Family	Wattage	Base Type	CRI/Color Temp	LED Construction	Enclosure Finish
A19	-	-	-	-	-
	5 5W/40W EQ 9 9W/60W EQ	E26 E26 Base	927 90 CRI, 2700K 930* 90 CRI, 3000K 940* 90 CRI, 4000K 950 90 CRI, 5000K *Only for 9W	F Filament	C Clear

Family	Wattage	Base Type	CRI/Color Temp	LED Construction	Enclosure Finish
B11	-	-	-	-	-
	3 3W/40W EQ 5 5W/60W EQ	E12 E12 Base E26 E26 Base	927 90 CRI, 2700K 930* 90 CRI, 3000K 940* 90 CRI, 4000K 950 90 CRI, 5000K *Only for 5W Base E12	F Filament	F* C Frosted Clear *Only for 2700K

Family	Wattage	Base Type	CRI/Color Temp	LED Construction	Enclosure Finish
BA11	-	-	-	-	-
	3 3W/40W EQ 5 5W/60W EQ	E12 E12 Base E26 E26 Base	927 90 CRI, 2700K	F Filament	F C Frosted Clear

Family	Wattage	Base Type	CRI/Color Temp	LED Construction	Enclosure Finish
G16.5	-	-	-	-	-
	3 3W/40W EQ	E12 E12 Base E26 E26 Base	927 90 CRI, 2700K 950 90 CRI, 5000K	F Filament	F C Frosted Clear

Family	Wattage	Base Type	CRI/Color Temp	LED Construction	Enclosure Finish
G25	-	-	-	-	-
	3 3W/40W EQ 5 5W/60W EQ	E26 E26 Base	927 90 CRI, 2700K 930 90 CRI, 3000K 940 90 CRI, 4000K 950 90 CRI, 5000K	F Filament	F* C Frosted Clear *Only for 2700K & 5000K

Family	Wattage	Base Type	CRI/Color Temp	LED Construction	Enclosure Finish
ST19	-	-	-	-	-
	3 3W/40W EQ 5 5W/60W EQ	E26 E26 Base	927 90 CRI, 2700K	F Filament	C Clear