

VAN34, Field-Adjustable Canopy Light



VAN34 (W/DROP LENS)



VAN34 (W/FLAT LENS)



PROJECT:

DATE:

TYPE:

PREPARED BY:

VAN34 (W/FROSTED DROP LENS)



VAN34 (W/FROSTED FLAT LENS)



KEY FEATURES

- Available in one size & three models with following wattages:
VAN34-30 : 30/25/20W
VAN34-60 : 60/50/40W
VAN34-90 : 90/80/70W
- Field-adjustable CCT (3000K/4000K/5000K)
- Built-in on/off photo
- Lightcloud Blue motionsensor option available
- Battery backup option available
- Impact-resistant, vandal-resistant
- Ideal for canopy applications
- Suitable for parking garages
- 0-10V dimming standard
- UL listed for wet locations
- 5-year, limited warranty

3-Way adjustable, ultra-economy canopy light

IP65

IP RATING



FIELD
ADJUSTABLE



0-10V
DIMMABLE



VANDAL
RESISTANT



HIGH
EFFICACY



100,000
HRS



WET
RATED

Lightcloud[®]

LIGHTCLOUD
BLUE



SENSOR
PORT

PERFORMANCE

VAN34-30	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	30W			20W			10W		
INPUT WATTS	31.2W	30.4W	31.2W	20.6W	20.1W	20.6W	11.6W	11.3W	11.6W
LUMENS	4,363	4,588	4,526	2,916	3,066	3,025	1,584	1,666	1,643
EFFICACY	139.8	150.9	145.1	141.6	152.5	146.8	136.6	147.4	141.6
CRI	83	85	84	84	85	84	84	85	84
VOLTAGE RATINGS	120-277V			120-277V			120-277V		

VAN34-30	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	30W			20W			10W		
INPUT WATTS	31.4W	30.7W	31.4W	21.2W	20.7W	21.2W	9.4W	9.2W	9.4W
LUMENS	4,442	4,696	4,625	2,996	3,167	3,119	1,206	1,275	1,256
EFFICACY	141.5	153.0	147.3	141.3	153.0	147.1	128.3	138.6	133.6
CRI	83	85	83	84	85	83	84	85	83
VOLTAGE RATINGS	480V			480V			480V		

VAN34, Field-Adjustable Canopy Light



PERFORMANCE

VAN34-30F	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	30W			20W			10W		
INPUT WATTS	31.2W	30.4W	31.2W	20.6W	20.1W	20.6W	11.6W	11.3W	11.6W
LUMENS	4,494	4,734	4,671	3,015	3,176	3,134	1,636	1,723	1,700
EFFICACY	144.0	155.7	149.7	146.4	158.0	152.1	141.0	152.5	146.6
CRI	83	85	83	83	85	83	83	85	83
VOLTAGE RATINGS	120-277V			120-277V			120-277V		

VAN34-30F	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	30W			20W			10W		
INPUT WATTS	31.4W	30.7W	31.4W	21.2W	20.7W	21.2W	9.4W	9.2W	9.4W
LUMENS	4,585	4,837	4,767	3,070	3,239	3,192	1,240	1,308	1,289
EFFICACY	146.0	157.6	151.8	144.8	156.5	150.6	131.9	142.2	137.1
CRI	83	85	83	83	85	83	84	85	83
VOLTAGE RATINGS	480V			480V			480V		

VAN34-30FFR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	30W			20W			10W		
INPUT WATTS	31.2W	30.4W	31.2W	20.6W	20.1W	20.6W	11.6W	11.3W	11.6W
LUMENS	3,975	4,187	4,134	2,658	2,800	2,764	1,442	1,519	1,500
EFFICACY	127.4	137.7	132.5	129.0	139.3	134.2	124.3	134.4	129.3
CRI	84	86	85	85	86	85	85	86	85
VOLTAGE RATINGS	120-277V			120-277V			120-277V		

VAN34-30FFR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	30W			20W			10W		
INPUT WATTS	31.4W	30.7W	31.4W	21.2W	20.7W	21.2W	9.4W	9.2W	9.4W
LUMENS	4,043	4,276	4,220	2,712	2,868	2,831	1,094	1,157	1,142
EFFICACY	128.8	139.3	134.4	127.9	138.6	133.5	116.4	125.8	121.5
CRI	84	86	84	85	86	84	85	86	84
VOLTAGE RATINGS	480V			480V			480V		

VAN34-30FR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	30W			20W			10W		
INPUT WATTS	31.2W	30.4W	31.2W	20.6W	20.1W	20.6W	11.6W	11.3W	11.6W
LUMENS	3,964	4,186	4,133	2,658	2,807	2,771	1,444	1,525	1,506
EFFICACY	127.1	137.7	132.5	129.0	139.7	134.5	124.5	135.0	129.8
CRI	84	86	84	84	86	84	85	86	84
VOLTAGE RATINGS	120-277V			120-277V			120-277V		

VAN34-30FR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	30W			20W			10W		
INPUT WATTS	31.4W	30.7W	31.4W	21.2W	20.7W	21.2W	9.4W	9.2W	9.4W
LUMENS	4,040	4,277	4,217	2,711	2,870	2,830	1,095	1,159	1,143
EFFICACY	128.7	139.3	134.3	127.9	138.6	133.5	116.5	126.0	121.6
CRI	84	86	84	84	86	84	85	86	84
VOLTAGE RATINGS	480V			480V			480V		

VAN34, Field-Adjustable Canopy Light



PERFORMANCE									
VAN34-60	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	60W			50W			40W		
INPUT WATTS	61.1W	59.3W	61.1W	49W	47.6W	49W	39.7W	38.5W	39.7W
LUMENS	8,772	9,266	9,120	7,205	7,611	7,491	5,965	6,301	6,202
EFFICACY	143.6	156.3	149.3	147.0	159.9	152.9	150.3	163.7	156.2
CRI	83	85	84	83	85	84	84	85	84
VOLTAGE RATINGS	120-277V			120-277V			120-277V		
VAN34-60	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	60W			50W			40W		
INPUT WATTS	61.2W	59.5W	61.3W	51.4W	50W	51.5W	41.9W	40.7W	42W
LUMENS	8,924	9,443	9,273	7,574	8,014	7,870	6,241	6,604	6,485
EFFICACY	145.8	158.7	151.3	147.4	160.3	152.8	148.9	162.3	154.4
CRI	83	85	84	83	85	84	83	85	84
VOLTAGE RATINGS	480V			480V			480V		
VAN34-60F	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	60W			50W			40W		
INPUT WATTS	61.1W	59.3W	61.1W	49.1W	47.7W	49.1W	39.8W	38.6W	39.8W
LUMENS	8,647	9,145	9,011	7,155	7,567	7,456	5,929	6,270	6,179
EFFICACY	141.5	154.2	147.5	145.7	158.6	151.9	149.0	162.4	155.3
CRI	83	85	84	83	85	84	83	85	84
VOLTAGE RATINGS	120-277V			120-277V			120-277V		
VAN34-60F	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	60W			50W			40W		
INPUT WATTS	61.2W	59.5W	61.3W	51.4W	50W	51.5W	41.9W	40.7W	42W
LUMENS	8,802	9,311	9,152	7,474	7,906	7,771	6,159	6,515	6,404
EFFICACY	143.8	156.5	149.3	145.4	158.1	150.9	147.0	160.1	152.5
CRI	83	85	84	83	85	84	83	85	84
VOLTAGE RATINGS	480V			480V			480V		
VAN34-60FFR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	60W			50W			40W		
INPUT WATTS	61.1W	59.3W	61.1W	49W	47.6W	49W	39.8W	38.6W	39.8W
LUMENS	8,003	8,459	8,334	6,585	6,960	6,857	5,457	5,768	5,683
EFFICACY	131.0	142.6	136.4	134.4	146.2	139.9	137.1	149.4	142.8
CRI	84	86	85	84	86	85	85	86	85
VOLTAGE RATINGS	120-277V			120-277V			120-277V		
VAN34-60FFR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	60W			50W			40W		
INPUT WATTS	61.2W	59.5W	61.3W	51.4W	50W	51.5W	41.9W	40.7W	42W
LUMENS	8,112	8,588	8,438	6,884	7,288	7,161	5,671	6,004	5,899
EFFICACY	132.5	144.3	137.7	133.9	145.8	139.0	135.3	147.5	140.5
CRI	84	86	85	84	86	85	84	86	85
VOLTAGE RATINGS	480V			480V			480V		

VAN34, Field-Adjustable Canopy Light



PERFORMANCE									
VAN34-60FR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	60W			50W			40W		
INPUT WATTS	61.1W	59.3W	61.1W	49W	47.6W	49W	39.7W	38.5W	39.7W
LUMENS	7,998	8,463	8,334	6,590	6,973	6,867	5,452	5,769	5,681
EFFICACY	130.9	142.7	136.4	134.5	146.5	140.1	137.3	149.8	143.1
CRI	84	86	85	84	86	85	84	86	85
VOLTAGE RATINGS	120-277V			120-277V			120-277V		
VAN34-60FR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	60W			50W			40W		
INPUT WATTS	61.2W	59.5W	61.3W	51.4W	50W	51.5W	41.9W	40.7W	42W
LUMENS	8,114	8,594	8,453	6,903	7,311	7,191	5,683	6,019	5,920
EFFICACY	132.6	144.4	137.9	134.3	146.2	139.6	135.6	147.9	141.0
CRI	84	86	85	84	86	85	84	86	85
VOLTAGE RATINGS	480V			480V			480V		
VAN34-90	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	90W			80W			70W		
INPUT WATTS	91W	88W	91W	79.7W	77.1W	79.7W	68.9W	66.6W	68.9W
LUMENS	12,776	13,588	13,240	11,393	12,117	11,807	10,077	10,717	10,443
EFFICACY	140.4	154.4	145.5	142.9	157.2	148.1	146.3	160.9	151.6
CRI	83	85	84	83	85	84	83	85	84
VOLTAGE RATINGS	120-277V			120-277V			120-277V		
VAN34-90	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	90W			80W			70W		
INPUT WATTS	90.7W	87.9W	90.8W	79.2W	76.8W	79.3W	71W	68.8W	71.1W
LUMENS	12,910	13,789	13,431	11,454	12,234	11,916	10,400	11,108	10,820
EFFICACY	142.3	156.9	147.9	144.6	159.3	150.3	146.5	161.5	152.2
CRI	83	85	84	83	85	84	83	85	84
VOLTAGE RATINGS	480V			480V			480V		
VAN34-90F	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	90W			80W			70W		
INPUT WATTS	91W	88W	91W	79.7W	77.1W	79.7W	68.9W	66.6W	68.9W
LUMENS	12,617	13,451	13,131	11,305	12,052	11,766	10,002	10,663	10,409
EFFICACY	138.6	152.9	144.3	141.8	156.3	147.6	145.2	160.1	151.1
CRI	83	85	84	83	85	84	83	85	84
VOLTAGE RATINGS	120-277V			120-277V			120-277V		
VAN34-90F	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	90W			80W			70W		
INPUT WATTS	90.7W	87.9W	90.8W	79.2W	76.8W	79.3W	71W	68.8W	71.1W
LUMENS	12,854	13,705	13,352	11,386	12,140	11,827	10,347	11,032	10,748
EFFICACY	141.7	155.9	147.0	143.8	158.1	149.1	145.7	160.3	151.2
CRI	83	86	84	83	86	84	83	86	84
VOLTAGE RATINGS	480V			480V			480V		

VAN34, Field-Adjustable Canopy Light



PERFORMANCE

VAN34-90FFR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	90W			80W			70W		
INPUT WATTS	90.9W	87.9W	90.9W	79.7W	77.1W	79.7W	68.9W	66.6W	68.9W
LUMENS	11,542	12,285	11,984	10,331	10,996	10,727	9,158	9,748	9,509
EFFICACY	127.0	139.8	131.8	129.6	142.6	134.6	132.9	146.4	138.0
CRI	84	86	85	84	86	85	84	86	85
VOLTAGE RATINGS	120-277V			120-277V			120-277V		

VAN34-90FFR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	90W			80W			70W		
INPUT WATTS	90.7W	87.9W	90.8W	79.2W	76.8W	79.3W	71W	68.8W	71.1W
LUMENS	11,808	12,576	12,251	10,426	11,104	10,817	9,470	10,086	9,825
EFFICACY	130.2	143.1	134.9	131.6	144.6	136.4	133.4	146.6	138.2
CRI	84	87	85	84	87	85	84	87	85
VOLTAGE RATINGS	480V			480V			480V		

VAN34-90FR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	90W			80W			70W		
INPUT WATTS	91W	87.9W	91W	79.7W	77W	79.7W	68.9W	66.7W	68.9W
LUMENS	11,599	12,351	12,056	10,361	11,033	10,769	9,162	9,756	9,523
EFFICACY	127.5	140.5	132.5	130.0	143.3	135.1	133.0	146.3	138.2
CRI	84	86	85	84	86	85	84	86	85
VOLTAGE RATINGS	120-277V			120-277V			120-277V		

VAN34-90FR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	90W			80W			70W		
INPUT WATTS	90.7W	87.9W	90.8W	79.2W	76.8W	79.3W	71W	68.8W	71.1W
LUMENS	11,753	12,554	12,232	10,421	11,130	10,845	9,475	10,120	9,860
EFFICACY	129.6	142.8	134.7	131.6	144.9	136.8	133.5	147.1	138.7
CRI	84	86	85	84	86	85	84	86	85
VOLTAGE RATINGS	480V			480V			480V		

VAN34, Field-Adjustable Canopy Light



TECHNICAL SPECIFICATIONS

COMPLIANCE

UL Listed

UL listed for wet locations

IP Rating

Ingress protection rating of IP65 for dust and water

DLC Listed

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC ID:

Model#	DLC Product ID	
	Stairwell & Passageway Luminaires	Fuel Pump Canopy Luminaires
VAN34-30	S-S1GLPF	S-8X7YT7
VAN34-30F	S-S53HPC	S-JMPXTV
VAN34-30FFR	S-KTXZ42	S-16T9BR
VAN34-30FR	S-N19B6Z	S-Z2VQZ0
VAN34-60	S-BQM2WM	S-7LFKXY
VAN34-60F	S-3B2XNC	S-Q4BNSD
VAN34-60FFR	S-LTS5DM	S-L58J9H
VAN34-60FR	S-QBTYVS	S-WFTCMF
VAN34-90	S-KBGVQY	S-N1XJL8
VAN34-90F	S-8W71LQ	S-SZ3MRR
VAN34-90FFR	S-Y483T0	S-F2H76Z
VAN34-90FR	S-XPWSHC	S-KJZQ0L
VAN34-30/480	S-9LY7DR	S-L359M1
VAN34-30F/480	S-KGGT92	S-ZK37P8
VAN34-30FFR/480	S-FQQ0DW	S-Q8PMPP
VAN34-30FR/480	S-QXM76N	S-6S20L7
VAN34-60/480	S-9VBYZ6	S-HHT9LL
VAN34-60F/480	S-QKL7C8	S-35X6Q4
VAN34-60FFR/480	S-ZZFT4	S-3NT7VF
VAN34-60FR/480	S-NG00V5	S-J8JM23
VAN34-90/480	S-9N1R6Q	S-L2MVG6
VAN34-90F/480	S-39194P	S-ZJK54N
VAN34-90FFR/480	S-6CSM8B	S-DHGX08
VAN34-90FR/480	S-79R32T	S-8XJH52

FIELD ADJUSTABLE

CCT Selectable: 3000/4000/5000k (factory default 4000K)

Selectable wattages:

VAN34-30 : 30/20/10W (factory default: 30W)

VAN34-60 : 60/50/40W (factory default: 60W)

VAN34-90 : 90/80/70W (factory default: 90W)

Integrated Daylight Photocell: Factory default: Off

CONSTRUCTION (CONTINUED)

Cold Weather starting

Minimum starting temperature is -40°C (-40°F)

Maximum Ambient Temperature

Suitable for use in up to 40°C (104°F)

Cold Weather starting for Battery Backup

Minimum starting temperature is 0°C (32°F)

Maximum Ambient Temperature for Battery Backup

Suitable for use in up to 60°C (140°F)

Housing

Precision die-cast aluminum

Mounting

Retrofit mounting plates for ceiling mounting

Lens

Polycarbonate lens

Reflector

Aluminum

Gasket

Ethylene Propylene Diene Monomer (EPDM) gasket

IP Ratings

Ingress Protection rating of IP65 for dust and water

Green Technology

Mercury and UV free. RoHS-compliant components.

Finish

Formulated for high durability and long lasting color

ELECTRICAL

Drivers:

Constant Current, Class 1, 120-277V, 50/60 Hz

VAN34-30:

30W: 120V: 0.25A, 208V: 0.15A, 240V: 0.13A, 277V: 0.10A

20W: 120V: 0.17A, 208V: 0.10A, 240V: 0.09A, 277V: 0.08A

10W: 120V: 0.09A, 208V: 0.06A, 240V: 0.06A, 277V: 0.06A

VAN34-60:

60W: 120V: 0.50A, 208V: 0.30A, 240V: 0.27A, 277V: 0.23A

50W: 120V: 0.41A, 208V: 0.24A, 240V: 0.21A, 277V: 0.19A

40W: 120V: 0.3A, 208V: 0.20A, 240V: 0.18A, 277V: 0.16A

VAN34-90:

90W: 120V: 0.76A, 208V: 0.45A, 240V: 0.39A, 277V: 0.34A

80W: 120V: 0.67A, 208V: 0.39A, 240V: 0.35A, 277V: 0.30A

70W: 120V: 0.58A, 208V: 0.34A, 240V: 0.30A, 277V: 0.27A

Drivers:

Constant Current, Class 1, 480V, 50/60 Hz

VAN34-30:

30W: 480V: 0.07A

20W: 480V: 0.05A

10W: 480V: 0.04A

VAN34-60:

60W: 480V: 0.13A

50W: 480V: 0.16A

40W: 480V: 0.10A

VAN34-90:

90W: 480V: 0.21A

80W: 480V: 0.18A

70W: 480V: 0.17A

VAN34, Field-Adjustable Canopy Light



TECHNICAL SPECIFICATIONS

ELECTRICAL

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

Battery Backup:

Battery backup will operate the fixture 90 minutes if power fails. Wired for 120-277V

Emergency Light Loss Factor:

VAN34-30 / VAN34-30/480: 0.08%

VAN34-60 / VAN34-60/480: 0.08%

VAN34-90 / VAN34-90/480: 0.073%

Photocell

120-277V compatible, Integrated Button Photocell included.

Surge Protection

L/N: 4KV, L/N-PE: 6KV (VAN34-30 (120/277V)

L/N: 6KV, L/N-PE: 6KV

LED CHARACTERISTICS

LEDs

Long-life, high-efficacy, surface-mount LEDs

OCCUPANCY SENSORS

Sensor Type: Integrated Microwave Sensor (MVS)

Input Voltage: 12VDC

Operating Frequency: 50/60Hz

Input Current: 30mA

Operating Temperature: -40°F to 140°F (-20°C to 60°C)

Max Mounting Height: 50 ft (MVS)

Detection Range: 50 ft. diameter mounted at 50 ft. (/MVS & /LCBS/MVS)

Daylight Sensing: The sensor will determine to trigger the light(s) on or not based on the daylight threshold level set.

Default Settings:

Motion Sensitivity: High

Brightness when triggered : 100%

Hold time: 20 minutes for all sensors

Standby to dim: 20%

Standby time: 1 minute

When vacant: Off

Adjustable Settings: Settings for Lightcloud Blue-enabled sensors can be adjusted using the mobile app. All other sensors will require MSR1 Remote to adjust the following sensor settings:

Standby to dim: 10%/20%/30%/50%

Standby time: 0s/10s/30s/1min/5min/10min/30min/60min/+∞

Daylight Threshold: 2Lux/10Lux/30Lux/50Lux/80Lux/120Lux/Disable

OTHER

Warranty

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Lifespan

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

VAN34, Field-Adjustable Canopy Light



WIRELESS NETWORK LIGHTING CONTROLS

Lightcloud products offer integrated network lighting control for a truly wireless solution that allows you to manage RAB's various compatible devices. With RAB's patented Rapid Provisioning technology, devices can be quickly and easily commissioned for residential and commercial applications. Each device can communicate with other devices in the mesh network. With two Lightcloud systems to choose from, it's easy to implement controls anywhere.




Learn more about Lightcloud wireless networked lighting controls.

Design Lights Consortium Network Lighting Controls:

- Interior Applications: N1XMLOEATB
- Exterior Applications: NHCZ2BIA17L

Lightcloud®

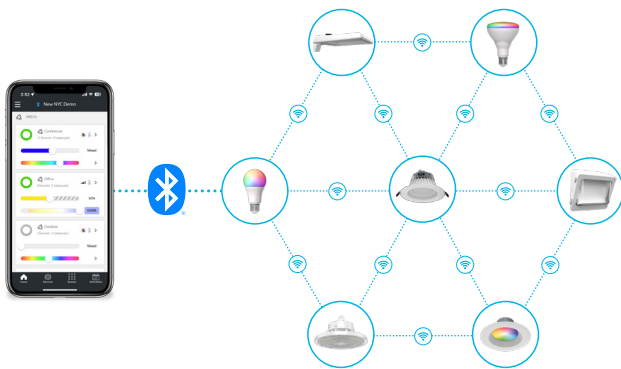

- Utilizes Bluetooth Mesh, eliminating the need for a Gateway or Hub
- Ideal for applications that need basic wireless control such as ON/OFF, dimming, color tuning, Schedules, and SmartShift
- Download the Lightcloud Blue mobile app for iOS or Android devices
- Add the XDIM/BRIDGE/LCB and LCGATEWAY to adopt premium Lightcloud Enterprise features

SIMPLE SETUP




Learn more about [Lightcloud Blue](#). Visit the [Lightcloud Blue Resources](#) page for more information on how to use the system.

Lightcloud®



- Utilizes a secure cellular and Zigbee mesh network that requires a Gateway or Hub (sold separately)
- Offers premium features like remote commissioning, demand response, BACnet integration, and more
- Download the Lightcloud Enterprise mobile app for iOS or Android devices

SIMPLE SETUP

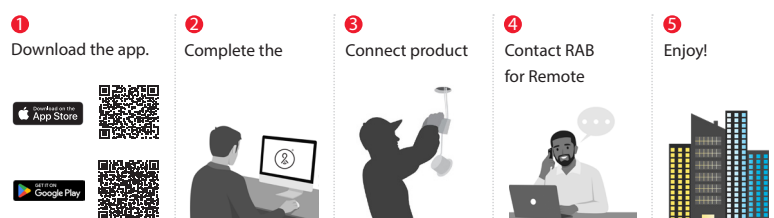

Learn more about [Lightcloud Enterprise](#). Visit the [Lightcloud Enterprise Resources](#) page for more information on how to use the system.

VAN34, Field-Adjustable Canopy Light



DIMENSIONS


VAN34

Weights: VAN34-30 5.06 lbs


VAN34-60: 6.05 lbs

VAN34-90: 6.16 lbs

W/Drop Lens

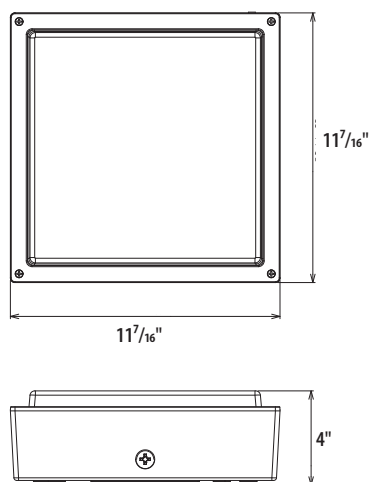

W/Flat Lens

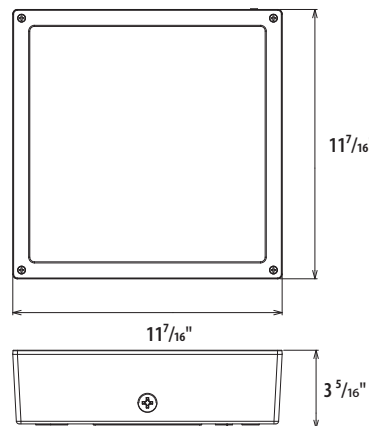

ACCESSORIES

Image	SKU#	UPC	Description
	VANLED RETROPLATE G2	019813830469	RETROPLATE VANLED 14" x 14" 10W-75W BRONZE VAVE
	VANLED RETROPLATEW G2	019813830476	RETROPLATE VANLED 14" X 14" 10W-75W WHITE VAVE
	LFVAN34A	192552045070	DROP LENS & DOOR FRAME KIT W/ SCREWS VAN34 BZ
	LFVAN34A-FR	192552045094	DROP LENS & DOOR FRAME KIT W/ SCREWS VAN34 FROSTED BZ
	LFVAN34FA	192552045117	FLAT LENS & DOOR FRAME KIT W/ SCREWS VAN34 BZ
	LFVAN34FA-FR	192552045131	FLAT LENS & DOOR FRAME KIT W/ SCREWS VAN34 FROSTED BZ
	LFVAN34FW	192552045124	FLAT LENS & DOOR FRAME KIT W/ SCREWS VAN34 WH
	LFVAN34FW-FR	192552045148	FLAT LENS & DOOR FRAME KIT W/ SCREWS VAN34 FROSTED WH
	LFVAN34W	192552045087	DROP LENS & DOOR FRAME KIT W/ SCREWS VAN34 WH
	LFVAN34W-FR	192552045100	DROP LENS & DOOR FRAME KIT W/ SCREWS VAN34 FROSTED WH
	MSR1	192552026055	MULTI SENSOR REMOTE

VAN34, Field-Adjustable Canopy Light



ORDERING MATRIX

VAN34

Family	Wattage		Color Temperature		Optics		Finish		Driver		Controls		Battery Backup	
VAN34														
30	30/20/10W	Blank		Blank	Drop	Blank	Bronze	Blank	120-	Blank	On/Off Pho-	Blank	None	
60	60/50/40W	3000/4000/5000K		Lens		W	White	277V,		to cell		/E	Battery Backup*	
90	90/80/70W	CCT Adjustable	F		Flat Lens			/480V	0-10V Dimming	/LC	Lightcloud Con-			
									480V,	troller				

* Battery backup option only available on 120/277V models